

Delta Hot Pumps

The Delta Hot Pump range combines high technology pump design with modern motors to produce a compact and efficient pump. Delta Hot Pumps can be easily installed in the tightest situation.


- > Streamlined compact design.
- > Choice of models for most bath sizes.
- > Accessories available.
- > Flexible unions, Air Switches and Air relief valves supplied as standard.
- > Quiet, safe and reliable operation.
- > Australian designed and manufactured.
- > Complies with Australian / New Zealand Standards AS/NZS 3136



The Delta Pump is easily activated by a fashionable air switch.

Warranty

Delta Hot Pumps are covered by Waterco's comprehensive 12 month warranty.

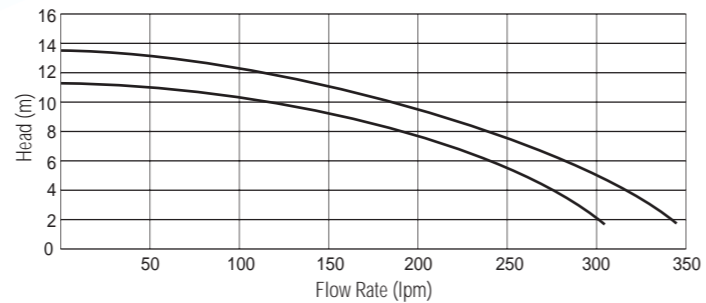

| Model | Pump | | Heater | | No. of Jets | Dimensions (mm) | | | Heat Constant |
|--------------|------|-------|--------|-------|-------------|-----------------|-----|-----|---------------|
| | Amps | Watts | Amps | Watts | | H | W | L | |
| Delta Hot 50 | 2.6 | 620W | 6.5 | 1.6kW | 3-4 | 260 | 185 | 475 | 4.4* |
| Delta Hot 75 | 3.6 | 860W | 6.5 | 1.6kW | 5-6 | 260 | 185 | 475 | 4.4* |

* Based on ideal heating with NO heat loss from the bath
Heat Constant is the time taken to heat 100 litres by 1°C
Time = Heat Constant x spa size in litres x required temp rise / 100
e.g. Time to heat a spa 900lts by 5°C with a Delta Hot 50 or Delta Hot 75
Time = 4.4 x 900 x 5 / 100
= 198 minutes

Note: Actual time to heat may be longer than calculated.

Portable Spa Pool Systems



Warm jets and relaxing bubbles



Portapac Spa Pool Systems



Portapac's are centrifugal spa pool pumps with built-in electric heaters and electronic controls. The Portapac circulates water through the spa jets as well as heating the water.


Delta Hot Pumps



Designed to fit underneath the "skirt" of the Spa, the Delta Hot Pump provides an invigorating water massage as well as ensuring the warmth of the water.



Click Here
To Return to
Website



Whiteside Pools

148 Barrington Street, Bibra Lake, WA
T: (08) 9434 5034
F: (08) 9438 2343
E: sales@wsph.com.au
W: www.pickapoolpart.com.au
P: PO Box 1562, Bibra Lake WA 6965


WATERCO
Water, the liquid of life

www.waterco.com

Portapac Spa Pool Systems

There are several Portapac models to choose from, each providing a range of creature comforts to suit your particular needs.

PORTAPAC SSC BOOST PANEL



Indicator lights for each mode

Pump Mode (available on all models)
Once the set temperature is reached, the heater will switch off, but the pump will continue to run. When the temperature of the water drops below the set temperature, the heater will switch on again.

Demand Mode (available on all models)
The pump and heater will run until the desired temperature is reached. When the temperature drops below the set temperature both the pump and heater will switch on again. The operation of the heater is delayed on start-up to ensure any "hot spots" are removed from the spa.

Constant temperature display and accurate adjustment


Temperature control at your fingertips

Light switch (available on Premium models only)
Operates the Spa Light or any other low current device.

Auxiliary Switch (available on Premium models only)
Operates an auxiliary device.

Boost Mode
This mode will activate the pump and a blower or booster pump, providing a more powerful stream from the spa jets or the air manifold. If left on for more than 30 minutes, the Portapac will automatically switch to demand mode.

Portapac SSC AIR PANEL



Air Mode (only available on SSC Air models)
This mode activates the pump and a blower. The onboard electronics will run the blower at high speed, medium speed, low speed or in a gentle cycle between high and low speeds to create a massaging effect. If left on for more than 30 minutes, the Portapac will automatically switch to demand mode.

Please note that the above modes can only be run one at a time


Air Switch

The Air Switch Button is used to cycle through the available modes of the Portapac. The Air Switch Button is sold separately and available in various profiles and colours to suit any décor. A small selection is given below.

| | |
|---------|---|
| 455102 | Flush Button - White |
| ASF202 | Air Button Low Profile - White (Other colours available) |
| ASF218 | Air Button Low Profile - Chrome A.B.S |
| ASF219 | Air Button Low Profile - Gold A.B.S |
| ASF220 | Air Button Low Profile - Chrome Brass |
| ASF222 | Air Button Low Profile - Gold Brass |
| ASF224 | Air Button High Profile - White (Other colours available) |
| AS&P083 | Air Button High Profile - Chrome Trim |
| AS&P084 | Air Button High Profile - Gold Trim |

Additional Outlets

Portapac Premiums have the added advantage of additional outlets

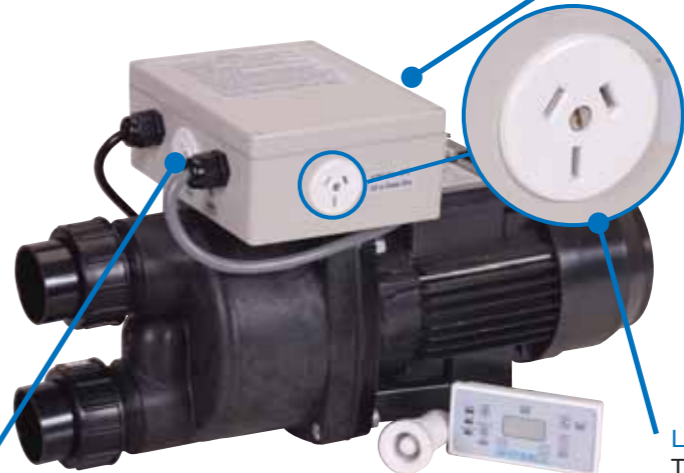

Sanitiser Outlet
If a UV light or ozonator is connected to this outlet, it will operate whenever the pump is in operation. The maximum current for this outlet is 0.5 Amps.

Light Outlet
This outlet can be used to connect a spa light or any other low current device.

Auxiliary Outlet
Once the auxiliary device is activated, the heater will automatically cut out. If left on for more than 30 minutes, the Portapac will automatically switch to demand mode.

TECHNICAL SPECIFICATIONS

| Model | Max Amp | Pump HP | Heater kW | Control | Pump | Demand | Air | Boost | Sanitiser Outlet | Light Outlet | Aux. Outlet |
|--------------------------|---------|---------|-----------|---------|------|--------|-----|-------|------------------|--------------|-------------|
| Demand | 10 | 1.0 | 1.6 | AS | ✓ | ✓ | | ✓ | | | |
| Demand Elite | 15 | 1.5 | 2.4 | AS | ✓ | ✓ | | ✓ | | | |
| SSC Air | | | | | | | | | | | |
| 10A | 10 | 1.0 | 1.6 | TP | ✓ | ✓ | ✓ | | | | |
| 15A | 15 | 1.5 | 2.4 | TP | ✓ | ✓ | ✓ | | | | |
| SSC Boost | | | | | | | | | | | |
| 10A | 10 | 1.0 | 1.6 | TP | ✓ | ✓ | | ✓ | | | |
| 15A | 15 | 1.5 | 2.4 | TP | ✓ | ✓ | | ✓ | | | |
| Premium SSC Boost | | | | | | | | | | | |
| 10A | 10 | 1.0 | 1.6 | TP | ✓ | ✓ | | ✓ | ✓ | ✓ | ✓ |
| 15A | 15 | 1.5 | 2.4 | TP | ✓ | ✓ | | ✓ | ✓ | ✓ | ✓ |


AS = Air Switch TP = Touch Pad

As the units are limited to the amount of amperage (Amps) they can deliver, not all features can be utilised at the same time.

| Model | Length (mm) | Width (mm) | Height (mm) |
|---------------------------------------|-------------|------------|-------------|
| Air Switch Models | | | |
| Demand, Demand Elite | 460 | 160 | 265 |
| SSC Touch Pad Models | | | |
| SSC Air, SSC Boost, SSC Premium Boost | 460 | 187 | 250 |

Warranty

Portapac Spa Pool Systems are covered by Waterco's comprehensive 12 month warranty.

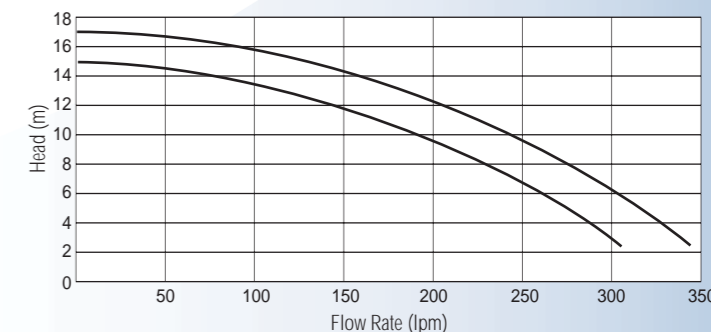

| Model | Unit Rated Amps | Motor Amps | Heater Amps | No. of Jets | Heat Constant |
|-----------------------|-----------------|------------|-------------|-------------|---------------|
| Demand | 10 | 3.6 | 6.7 | 4-6 | 4.4* |
| Demand Elite | 15 | 4.8 | 10 | 6-8 | 2.9* |
| SSC Air 10A | 10 | 3.6 | 6.7 | 4-6 | 4.4* |
| SSC Air 15A | 15 | 4.8 | 10 | 6-8 | 2.9* |
| SSC Boost 10A | 10 | 3.6 | 6.7 | 4-6 | 4.4* |
| SSC Boost 15A | 15 | 4.8 | 10 | 6-8 | 2.9* |
| Premium SSC Boost 10A | 10 | 3.6 | 6.7 | 4-6 | 4.4* |
| Premium SSC Boost 15A | 15 | 4.8 | 10 | 6-8 | 2.9* |

* Based on ideal heating with NO heat loss from the spa
Heat Constant is the time taken to heat 100 litres by 1°C
Time = Heat Constant x spa size in litres x required temp rise / 100
E.g. Time to heat a 1700lts spa by 5°C with an SSC Air 15A
Time = 2.9 x 1700 x 5 / 100
= 246.5 minutes

Note: Actual time to heat may be longer than calculated. The use of a spa or solar blanket is highly recommended.