

EXOTUF Filter

Superior strength and dependability

Designed to cope with the cyclic pressures of the modern day swimming pool, Exotuf filter vessels are precision injection moulded for superior strength and dependability.

Exotuf filters are ideal for pools equipped with in floor cleaning systems and high powered pumps.

- Granular media filtration
- Multiport valve for ease of use
- Pressure rated at 350 kPa
- Corrosion and UV resistant



Superior Strength

Exotuf filters are considered one of the strongest filters within its class. Its filter vessel is precision injection moulded within minimal tolerances for enhanced structural strength.

Pressure rated at 350 kPa, Exotuf filters are ideal for pools equipped with in floor cleaning systems and high powered pumps.



Multiport valve with ergonomic handle and quick connect barrel unions

Clear sight glass for backwash inspection

Pressure gauge to determine the filter's capacity

Multiport valve clamp provides 360° orientation of the Multiport valve for simple installation and service

UV and corrosion resistant

Hydraulically balanced flow distribution, to maximise filtration and backwashing


Large filter base for stable floor mounting

Maximum working temperature of 50°C


Ease of Maintenance

Cleansing the filter simply requires turning the filter's multiport lever from the "filter" position to the "backwash" position, which reverses the flow of water in the filter, flushing the filter bed.

Filter Mode

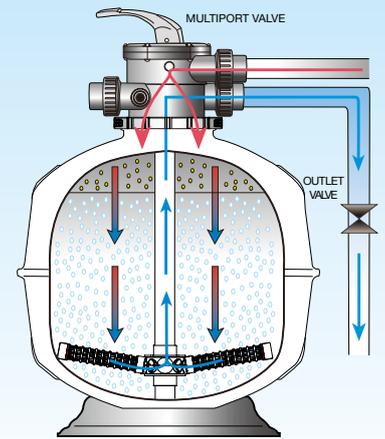

Backwash Mode

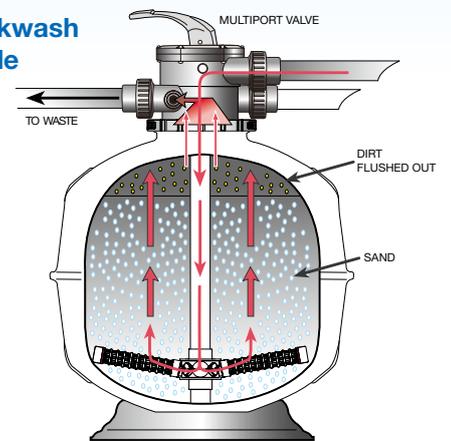

Technical Specification

| Model No. | Valve Size (mm) | Inner Dia. (mm) | Filter Area (sq. m ²) | Bed Depth (mm) | Max. Flow* (lpm) | Max. Pool Size (litres) | Min. Backwash (lpm) | Media Volume (litres) | Sand 16/30 (kg) | Zeolite 1 - 2.2 (kg) |
|-----------|-----------------|-----------------|-----------------------------------|----------------|------------------|-------------------------|---------------------|-----------------------|-----------------|----------------------|
| E600 | 40 | 600 | 0.28 | 250 | 226 | 81,000 | 189 | 89 | 130 | 107 |


Dimension (mm)

| Model | Valve Size | A | B | C | D | E | F | G | H | V | K |
|-------|------------|-----|-----|-----|-----|-----|-----|-----|----|-----|-----|
| E600 | 40 | 942 | 650 | 484 | 182 | 655 | 799 | 708 | 88 | 560 | 115 |

Warranty

Exotuf filters are covered by a 10-year tank warranty and 1-year warranty on all other components. Commercial installations are covered by a 5-year (1 year full + 4 years pro rata) tank warranty and 1-year warranty on all other components.

Please refer to Waterco's warranty terms and conditions

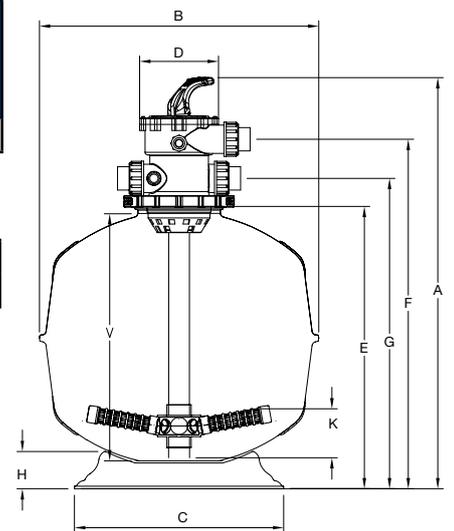

Whiteside Pools

148 Barrington Street, Bibra Lake, WA
 T: (08) 9434 5034
 F: (08) 9438 2343
 E: sales@wsph.com.au
 W: www.pickapoolpart.com.au
 P: PO Box 1562, Bibra Lake WA 6965

Click Here
To Return to
Website

